




Art No. WC0014C

## Outdoor IP Dome Camera, H.264

This PTZ network camera is a high-performance device for use in professional and demanding surveillance situation. It supports multiple network protocols for MPEG4 or MJPEG live video transmission, and you can easily view, record and operate the camera via the supplied video viewer software or the web browser. It is also capable of following the moving object precisely with Intelligent Auto Tracking, and long-time operation with High Spindle Reliability. Video surveillance over IP network infrastructure is available and easy from anywhere, at anytime.

### Feature:

- 1/3" H.R. CCD image sensor
- Resolution: NTSC: 768 (H) x 494 (V)  
PAL: 752 (H) x 582 (V)
- Advanced Auto Tracking Accuracy - to follow the moving object
- MPEG4, MJPEG and H.264 compression
- Supports 360 degree pan and 90 degree tilt, continuous rotation
- 22x Zoom F1.6 (wide) ~ F3.7(Tele), view: 60°~4°
- Flexible Color / Shutter Parameters Adjustment - to adapt various light conditions
- Outdoor IP Rating with IP66
- Motion detection and alarm notification via Email
- Supports 3G Mobile Phone Surveillance (iPhone, BlackBerry, WinCE, J2ME & Android, Symbian Support)
- Supports multiple access levels with password
- Supports up to 10 users on-line
- Complete IP surveillance system with Central Management System (CMS) software for up to 16 cameras at the same time

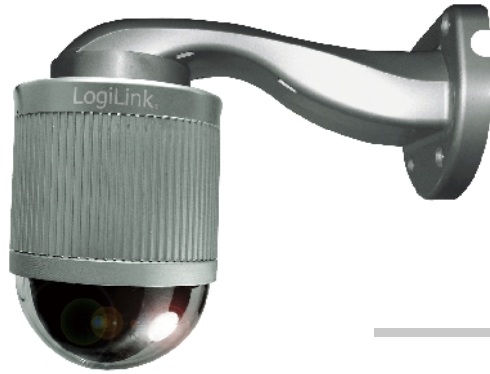

Art No. WC0014C

## Outdoor IP Dome Camera, H.264

**Specification:**

<b>Enviornment</b>	
In/Out door use	Outdoor
<b>• Network</b>	
LAN Port	YES
LAN Connection	10/100 Based-T Ethernet
Frame Rate	NTSC: 30, PAL: 25
Number of Online Users	10
Network	With 3G Mobile Phone Surveillance
<b>• Video</b>	
Video Compression	H.264 / MPEG4 / MJPEG
Video Remote Control	YES
Video Adjustment	Brightness, Contrast, Saturation and Hue
<b>• Camera</b>	
Image Sensor	1/4" Sony Color Super HAD CCD
Pixels	NTSC: 768(H) x 494(V) / PAL: 752(H) x 582(V)
Lens	f3.9 ~ 85.9mm
F-number	F1.6 (Wide) ~ 3.7 (Tele)
Viewing Angle	60°~4°
Pan Range	360°
Tilt Range	90°
Zoom	22x Optical Zoom (f3.9 ~ 85.9mm)
Smart Zoom	YES
Max. Zoom Speed	Approx. 7s (Tele~ Wide)
Shutter Speed	1/60 (1/50) to 1/100,000 sec.
Min Illumination	0.3 Lux / F1.6

**Remark:** For 3G Mobile Phone Surveillance, please download the mobile software installation for remote Surveillance via Mobile Phone or PDA from www.logilink.com.


\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered namework of their respective owners.



WC0014C v.1.0  
Outdoor Dome IP Camera,  
H.264, with 22x Optical Zoom

4 260113 571828

Made in Taiwan

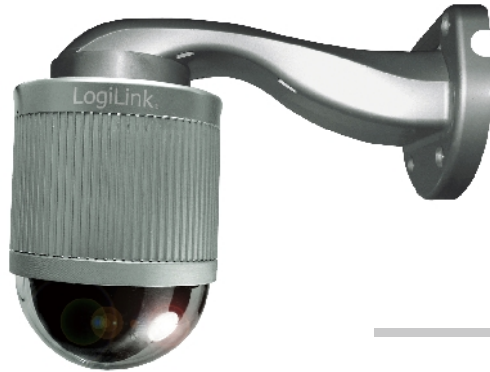

Art No. WC0014C

## Outdoor IP Dome Camera, H.264

### Specification:

Video Output	1.0 Vp-p. 75Ω
BLC	On / Off
White Balance	Auto / Indoor 1 / Indoor 2 / Sun / Cloudy * Indoor1=9000K; Indoor2=3000K; Sun=5500K; Cloudy=7000K
Camera ID	0~255
<b>• Software</b>	
Supported Protocols	DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP
Security	Multiple user access levels with password protection
Web Management	YES (Control up to 16 network cameras simultaneously)
Remote Control	YES
Motion Detection	YES
Alarm and event Notification	Image upload over FTP and Email
Mobile	Supports 3GPP mobile surveillance
<b>• Others</b>	
General I/O	Alarm in x1
Power	12V DC, 1.5A
Operating Temp.	0~40°C
Humidity	85%
Minimum Web Browsing Requirements:	- Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD - 256 MB RAM - AGP graphics card, Direct Draw, 32MB RAM - Windows 7, Vista, XP, Windows 2000 Server, ME, 98, DirectX 9.0 or later - Internet Explorer 6.x or later
Dimension (mm)**	145(D) x 184(H)

\* The specifications are subject to change without notice.

\*\* Dimensional tolerance: (± 5mm)


\* The specifications and pictures are subject to change without notice.  
\*\* All trade names referenced are the registered trademark of their respective owners.



WC0014C v.1.0  
Outdoor Dome IP Camera,  
H.264, with 22x Optical Zoom

4 260113 571828

Made in Taiwan

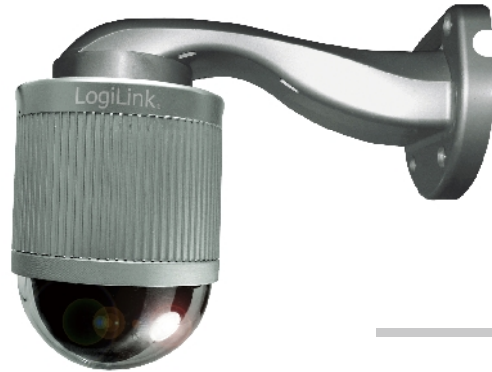

Art No. WC0014C

## Outdoor IP Dome Camera, H.264

### Package contents

- 1 x 22x PTZ Network Camera
- 1 x CD-ROM disc for user manual & licensed software "Video Viewer"
- Optional: Power Adapter DC12 1.5A

### Note:

The DC12V 1.5A adapter & power cord are not included with the sales package. Please prepare by yourself or order if necessary.

### Optional Accessories (Order separately if necessary)

- WC0014A: AC power adapter for WC0014
- WC0014B: Bracket for WC0014

### WC0014B Bracket Package contents

• 1 x Bracket & Connecting Tray	
• 4 x Wall mounting screw	
• 4 x Wall plug	
• 1 x Cap	
• 6 x M6 Nylok screw	
• 1 x Spirit level	
• 1 x M4 screw	

### Packaging Information:

- Packing Dimension: mm
- Packing Weight: kg
- Carton Dimension: mm
- Carton Q'ty: pcs
- Carton Weight: kg



\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered namework of their respective owners.

